LONGITUDINAL PHYSICS III

		REISER
1.	LONGITUDINAL COOLING FROM ACCELERATION	5.4.6
2.	LONGITUDINAL INSTABILITY	6.3.2
3.	BUNCH COMPRESSION	—
4.	NEUFFER DISTRIBUTION	5.4.8

National® Brand 42-182 100 SHEETS Made in U.S.A.

LONGITUDINAL COOLING

1. AT INJECTION BEAM UNDERGOES LARGE LONGITUDINAL EXPANSION

2. $T_{\perp 0} = T_{\parallel 0}$ AT SOURCE BUT $T_\perp \neq T_\parallel$ after acceleration

3. IMPLICATIONS FOR BEAM STABILITY, EMITTANCE EVOLUTION

CONSIDER 1 D DIODE:

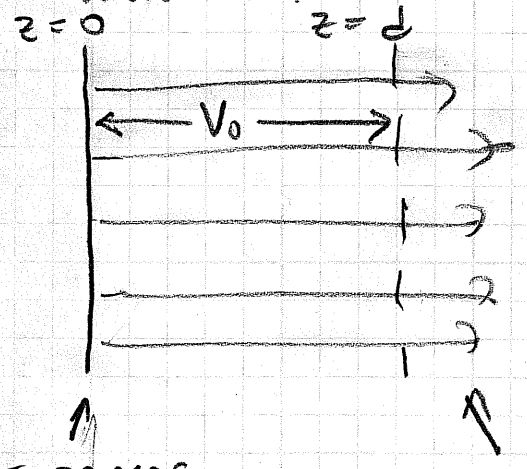

AT SOURCE

$$E_i = \frac{\Delta p_{z1}^2}{2m}$$

$$\Delta E_{\parallel 0} = \frac{\Delta p_z^2}{2m} = \frac{1}{2} k T_0$$

$$\bar{V}_0 = 0$$

AT END OF INJECTOR

$$E_i = qV_0 + \frac{\Delta p_{z1}^2}{2m}$$

$$\Delta E_{\parallel f} = \Delta E_{\parallel 0} \neq \frac{\Delta p_{zf}^2}{2m}$$

$$\bar{V}_f = \sqrt{\frac{2qV_0}{m}}$$

$$E = \frac{p_z^2}{2m} \Rightarrow 2E\Delta E = \frac{2 p_z \Delta p_z}{2m}$$

$$\text{or} \quad \frac{\Delta E}{E} = \frac{2\Delta p_z}{p_z}$$

$$\frac{1}{2} k T_f = \frac{\Delta p_z^2}{2m} = \left(\frac{p_z \Delta E}{2E}\right)^2 \frac{1}{2m} = \frac{\Delta E^2}{4E} = \frac{kT_0}{2}\left[\frac{1}{2}\frac{kT_0}{qV_0}\right]$$

$$\boxed{kT_f = \frac{1}{2} kT_0 \left[\frac{kT_0}{qV_0}\right]}$$

$$kT_f = \frac{1}{2} kT_0 \underbrace{\left[\frac{kT_0}{qV_0}\right]}_{\ll 1}$$

Example $1000^\circ \Leftrightarrow 0.1\,eV$

For $V_0 = 1\,MeV$

$kT_0 = 0.1\,eV$

$kT_f = 5\times10^{-9}\,eV$!!

How can $\Delta kT_f \ll kT_0$ but $\Delta E_f = \Delta E_0$?

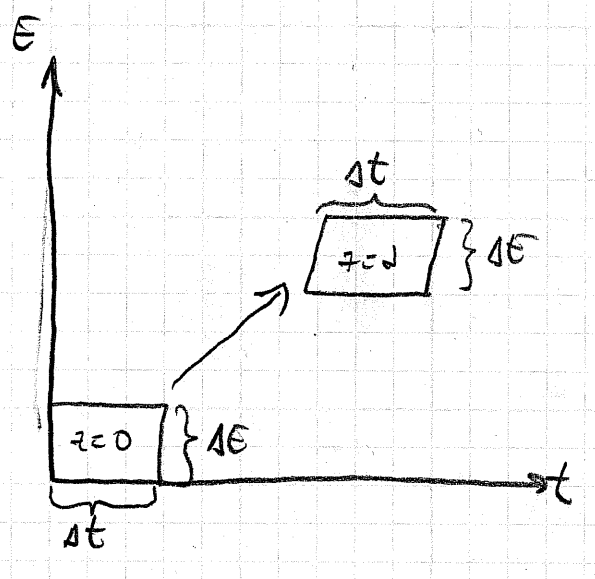

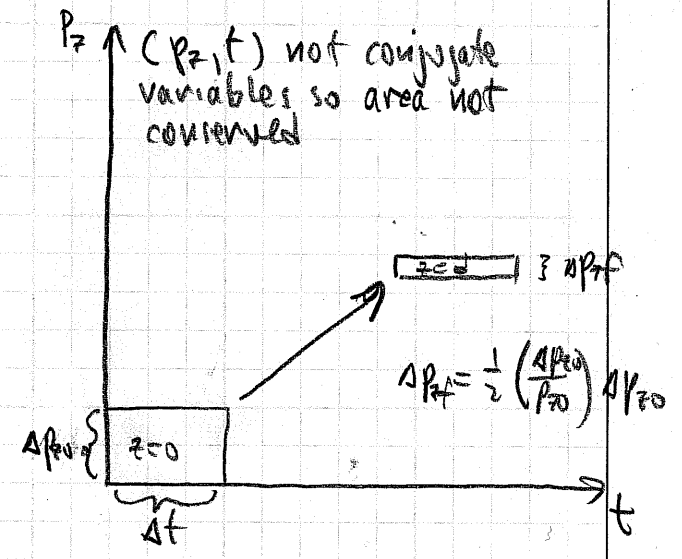

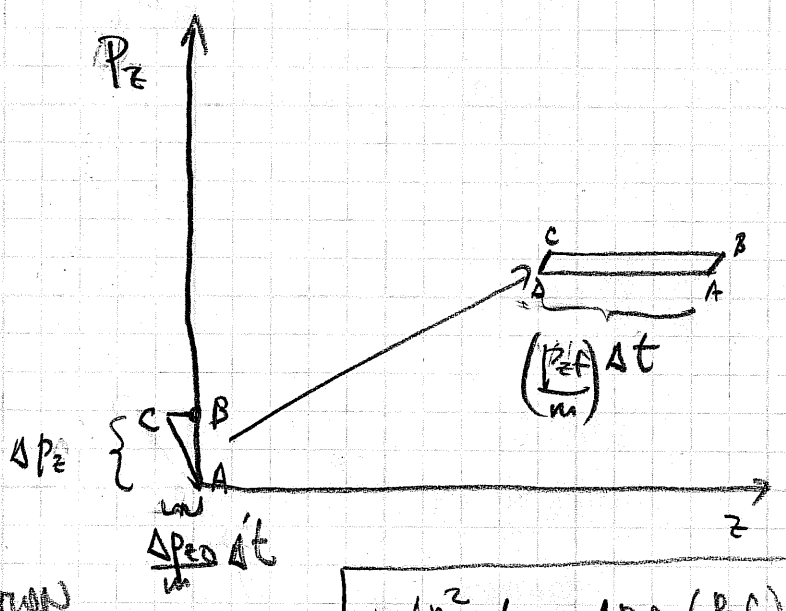

Conservation of phase space area:

$$\boxed{\frac{1}{2}\frac{\Delta p_z^2}{m}\Delta t = \Delta p_{zf}\left(\frac{p_{zf}}{m}\right)\Delta t \Rightarrow \Delta p_{zf} = \frac{1}{2}\frac{\Delta p_{z0}^2}{p_{z0}}}$$ ✓

National® Brand 42-182 100 SHEETS Made in U.S.A.

NOTE: $\overline{z'} \equiv \left\langle \frac{dz}{ds} \right\rangle$; $s \equiv v_0 t$

Let $u = \left\langle \frac{dz}{dt} \right\rangle$; then $u = v_0 \overline{z'}$

= fluid velocity in comoving frame

So

$$\frac{\partial \lambda}{\partial s} + \frac{\partial}{\partial z}(\lambda \overline{z'}) = 0 \quad \Rightarrow \quad \boxed{\frac{\partial \lambda}{\partial t} + \frac{\partial}{\partial z}(\lambda u)}$$

$$\& \quad \frac{\partial \overline{z'}}{\partial s} + \overline{z'}\frac{\partial}{\partial z}\overline{z'} + \frac{1}{\lambda}\frac{\partial}{\partial z}(\lambda \Delta z'^2) = \overline{z''}$$

$$\Rightarrow \frac{\partial u}{\partial t} + u\frac{\partial u}{\partial z} + \frac{1}{\lambda}\frac{\partial}{\partial z}\left(\lambda\left[\langle v_z^2\rangle - u^2\right]\right) = \overline{\ddot{z}}$$

Since $p_z = m\int_{-\infty}^{\infty} n\left[v_z^2 - u^2\right] dv_z$ where $n = \frac{\lambda}{\pi r_b^2}$

$$\Rightarrow \boxed{\frac{\partial u}{\partial t} + u\frac{\partial u}{\partial z} + \frac{\pi r_b^2}{m\lambda}\frac{\partial}{\partial z}p_z = \overline{\ddot{z}}}$$

where $\ddot{z} = \frac{d^2 z}{dt^2} = \frac{F_z}{m}$

"LONGITUDINAL" OR "RESISTIVE WALL" INSTABILITY

Let us return to the 1-D FLUID EQUATIONS

SEE REISER 6.3.2.
CALLAHAN-MILLER, PH.D. DISSERTATION, U.C. DAVIS, 1994

$$\frac{\partial \lambda}{\partial t} + \frac{\partial}{\partial z}\lambda u = 0$$

$$\frac{\partial u}{\partial t} + u\frac{\partial u}{\partial z} + \frac{1}{\rho}\frac{\partial p_z}{\partial z} = \frac{-q\varrho}{4\pi\epsilon_0 m v_0^2}\frac{\partial \lambda}{\partial z} + \frac{qE_z}{m}$$

IGNORE AGAIN

EXTERNALLY GENERATED

AS BEAM PASSES CONDUCTING SURFACE IMAGE CHARGE AND CURRENT INTERACTS WITH BEAM. HIGHLY GEOMETRY DEPENDENT.

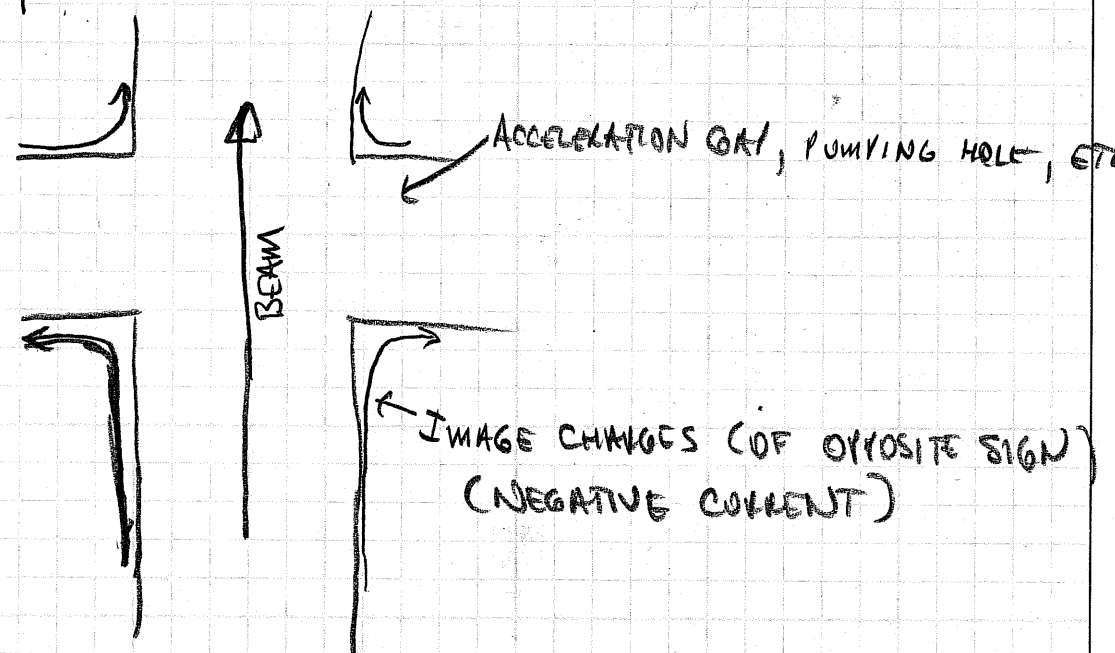

CAN BE CALCULATED APPROXIMATELY USING CIRCUIT MODEL.

RESISITIVITY IN WALL, AND COMPLICATED ELECTRON FLOW PATTERNS CREATE A RETARDING ELECTRIC FIELD ON BEAM.

MODEL OF IMPEDANCE (IN LONG WAVELENGTH REGIME)

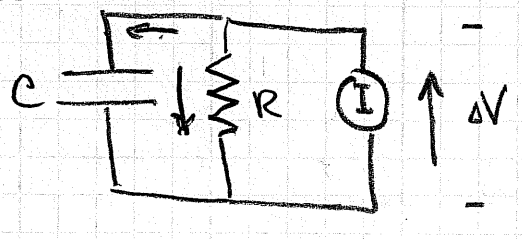

ONE MODULE (OF MANY, EACH SEPARATED BY DISTANCE L)

$$I = C\frac{d\Delta V}{dt} + \frac{\Delta V}{R}$$ ← CONSERVATION OF CURRENT

Let $E = -\Delta V L$ $\quad C^{\dagger} = CL \quad R^{*} = \frac{R}{L}$

Let $I = I_0 + I_1 e^{-i\omega t} \quad E = E_0 + E_1 e^{-i\omega t}$

$$I_1 = -i\omega C^{\dagger} E_1 - \frac{E_1}{R^{*}}$$

$*$ ⇒ evaluated per meter
$\dagger$ ⇒ (multiply by meter)

$$\Rightarrow \quad E_1 = \frac{-R^{*}}{1 - i\omega C^{\dagger} R^{*}} I_1 \qquad Z^{*} \equiv \frac{-E_1}{I_1} = \frac{R^{*}}{1 - i\omega C^{\dagger} R^{*}}$$

NOW LET'S RETURN TO THE 1D FLUID EQUATIONS

$$\frac{\partial \lambda}{\partial t} + \frac{\partial}{\partial z}\lambda v = 0 \qquad \frac{\partial u}{\partial t} + u\frac{\partial u}{\partial z} = \frac{-qq}{4\pi\varepsilon_0 m}\frac{\partial \lambda}{\partial z} + \frac{qE_z}{m}$$

↑ EXTERNAL FIELD

Let $\lambda = \lambda_0 + \lambda_1 \exp[i(kz - \omega t)]$

$u = v_0 + u_1 \exp[i(kz - \omega t)]$

$$-i\omega\lambda_1 + ik\lambda_0 u_1 + ikv_0\lambda_1 = 0$$

$$-i\omega u_1 + ikv_0 u_1 + \underbrace{\frac{ikqq\lambda_1}{4\pi\varepsilon_0 m}}_{=\frac{ikc_s^2}{\lambda_0}\lambda_1} + \frac{q}{m}Z^*\underbrace{(\lambda_0 v_1 + v_0\lambda_1)}_{=I_1} = 0$$

$$\begin{bmatrix} \omega - kv_0 & -k\lambda_0 \\ -\frac{c_s^2 k}{\lambda_0} + \frac{iq}{m}Z^* v_0 & \omega - kv_0 + \frac{iq}{m}Z^*\lambda_0 \end{bmatrix} = 0$$

THE DETERMINANT OF THE ABOVE MATRIX MUST VANISH:

$$(\omega - kv_0)^2 + \frac{iq}{m}Z^*\lambda_0(\omega - kv_0) - c_s^2 k^2 - \frac{iq}{m}Z^*\lambda_0 v_0 k = 0$$

$$\boxed{(\omega - kv_0)^2 - c_s^2 k^2 + \frac{iqZ^*\lambda_0\omega}{m} = 0}$$ (LAB FRAME)

Using a Galileam transformation, in the beam frame:

$$\omega' = \omega - kv_0$$ ' denotes beam frame

$$k' = k$$

$$\boxed{\omega'^2 - c_s^2 k'^2 + \frac{iqZ^*(\omega')\lambda_0(\omega' + k'v_0)}{m} = 0}$$ (BEAM FRAME)

NOTE $Z^*(\omega') = Z^*(\omega = \omega' + k'v_0)$

National® Brand 42-182 100 SHEETS Made in U.S.A.

CASE I PURE RESISTIVE IMPEDANCE $Z^* = R^*$ (REAL)

$$\omega' = \pm c_s k' \sqrt{1 - iR^* \frac{q\lambda_0}{m} \frac{(\omega' + k'V_0)}{c_s^2 k'^2}}$$

Using $c_s^2 = \dfrac{qq\lambda_0}{4\pi\epsilon_0 m}$ & $\dfrac{\omega'}{k'} \sim c_s << V_0$

$$\omega' = \pm c_s k' \sqrt{1 - iR^* \left(\frac{4\pi\epsilon_0}{q}\right) \frac{V_0}{k'}}$$

$$\simeq \pm \left[c_s k' - i \frac{c_s V_0}{2} \left(\frac{4\pi\epsilon_0}{q}\right) R^* \right]$$

Since $\lambda_1, E_1 \sim \exp\left[i(k'z - \omega' t)\right]$

Choosing "+" ($\mathrm{Re}\,\omega > 0$) $\Rightarrow$ $z = c_s t$ line of const phase $\Rightarrow$ Forward propagation

($\mathrm{Im}\,\omega < 0$) $\Rightarrow$ $\lambda_1 \sim \exp\left[-\dfrac{c_s V_0}{2}\left(\dfrac{4\pi\epsilon_0}{q}\right) R^* t\right]$ $\Rightarrow$ DECAYING PERTURBATION

CHOOSING "−"

($\mathrm{Re}\,\omega < 0$) $\Rightarrow$ $z = -c_s t$ is line of constant phase

$\Rightarrow$ BACKWARD PROPAGATING

$$\Rightarrow \lambda_1 \sim \exp\left[\underbrace{+\frac{c_s V_0}{2}\left(\frac{4\pi\epsilon_0}{q}\right) R^* t}_{G}\right]$$

INSTABILITY!

$$G = \left[\frac{C_s V_0}{2} \left(\frac{4\pi\varepsilon_0}{g} \right) R^* t \right] = \text{LOGARITHMIC GAIN OF INSTABILITY} = \ln\left(\frac{\lambda_{1\,final}}{\lambda_{1\,initial}} \right)$$

$$\left(\text{Since} \quad \frac{\lambda_{1f}}{\lambda_{10}} = \exp[G] \right)$$

$$\text{Now} \quad t_{max} = \left\{ \min \left\{ \begin{array}{l} l_b / c_s \\ t_{residence} \end{array} \right. \right.$$

l_b / c_s: TRANSIT TIME FOR PERTURBATION TO TRAVEL FROM HEAD TO TAIL

$t_{residence}$: RESIDENCE TIME WITHIN ACCELERATOR

If upper condition holds

$$G \sim \frac{V_0^2}{2} \left(\frac{4\pi\varepsilon_0}{g} \right) R^* \Delta t$$

If lower condition holds

$$G \sim \sqrt{\lambda}$$

$$I \sim \frac{6\ \text{MJ}}{4\ \text{GeV}\ 200\ \text{ns}} \sim \frac{QV}{V\Delta t}$$

$$\sim 7.5\ \text{kA}$$

EXAMPLE:

FOR MATCHED BEAM IMPEDANCE

$$R^* = \frac{dV/ds}{I} \sim \frac{10^6\ \text{MV/m}}{10\ \text{kA}} \sim 100\ \Omega/\text{m}$$

$$V_0 \sim 0.2c$$

$$\Delta t \sim 200\ \text{ns}$$

$$G \sim \frac{V_0^2}{2}\left(\frac{4\pi\varepsilon_0}{g}\right) R^* \Delta t$$

$$\sim 3.6$$

National® Brand 42-182 100 SHEETS Made in U.S.A.

$R^* = 100\,\Omega/m$

(11)

FOR ALL SIMULATIONS (p 11-15)

$V_0 = c/3$

$I = 3\,kA$

$l_b = 10\,m$

$\frac{r_b}{r_p} = 0.4$

$kT_\perp = kT_\parallel = 10\,keV$

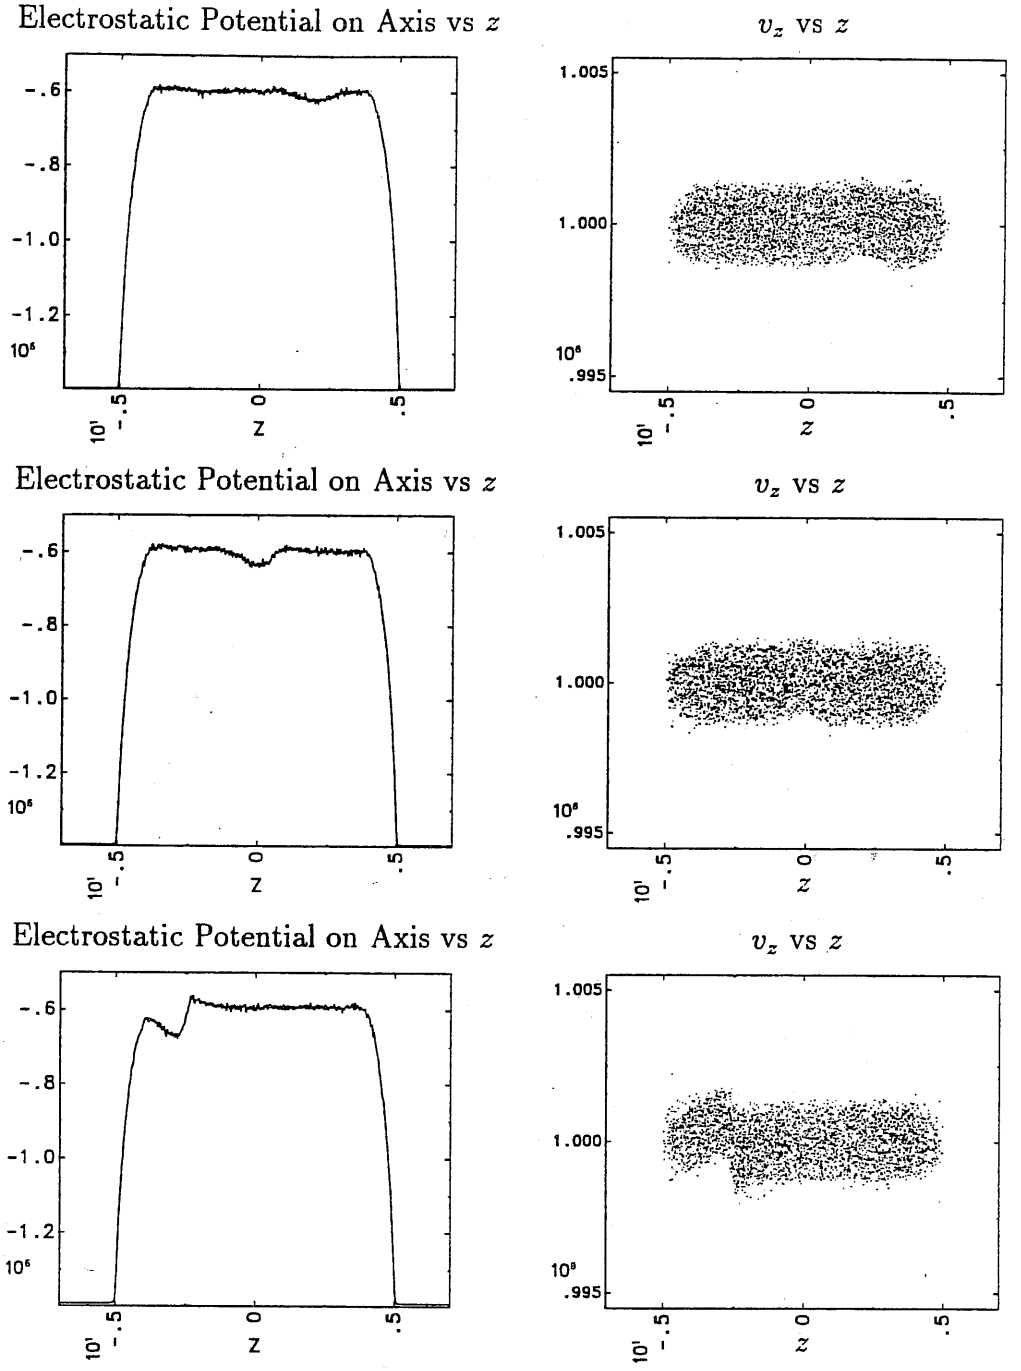

Figure 4.2: A simulation with 100 Ω/m resistance shows moderate growth. (a) 6.6 μs, (b) 10.9 μs, (c) 17.5 μs

from D. A. Callahan Miller, Ph.D. Thesis
U.C. Davis, 1994

$R^* = 100\ \Omega/m$

(12)

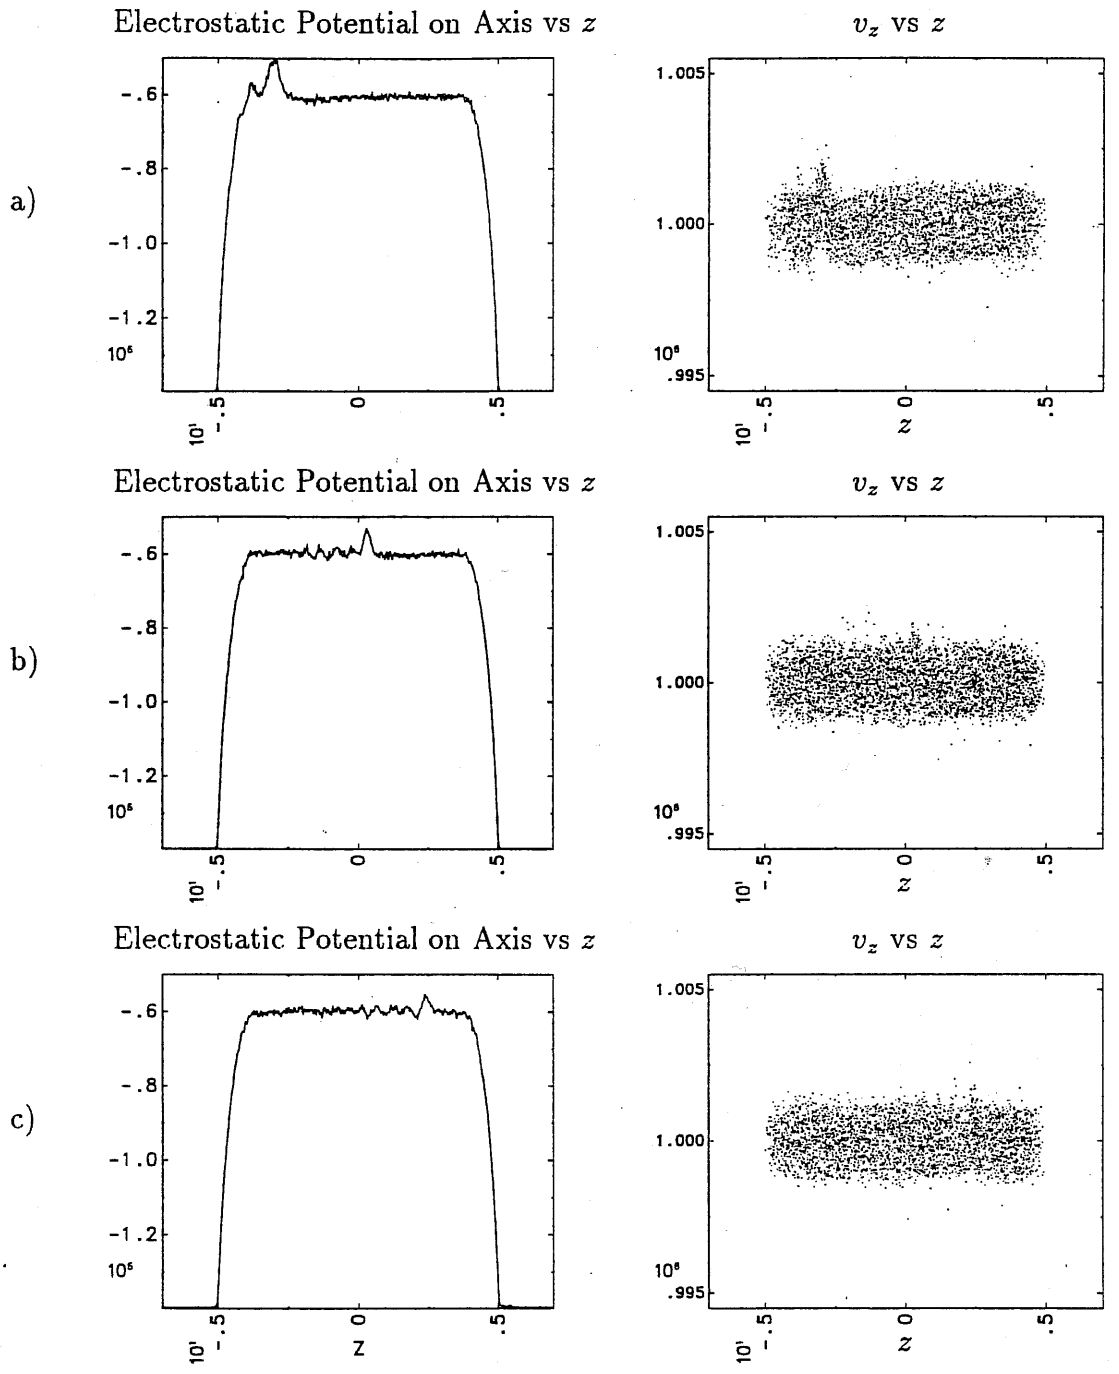

Figure 4.3: The perturbation reflects off the beam end and decays as it travels forward. (a) 28.4 μs, (b) 35.0 μs, (c) 39.4 μs

from D.A. Callahan Miller, Ph.D. Thesis
U.C. Davis, 1994
(FORWARD WAVE)

$R^* = 200\,\Omega/m$

(13)

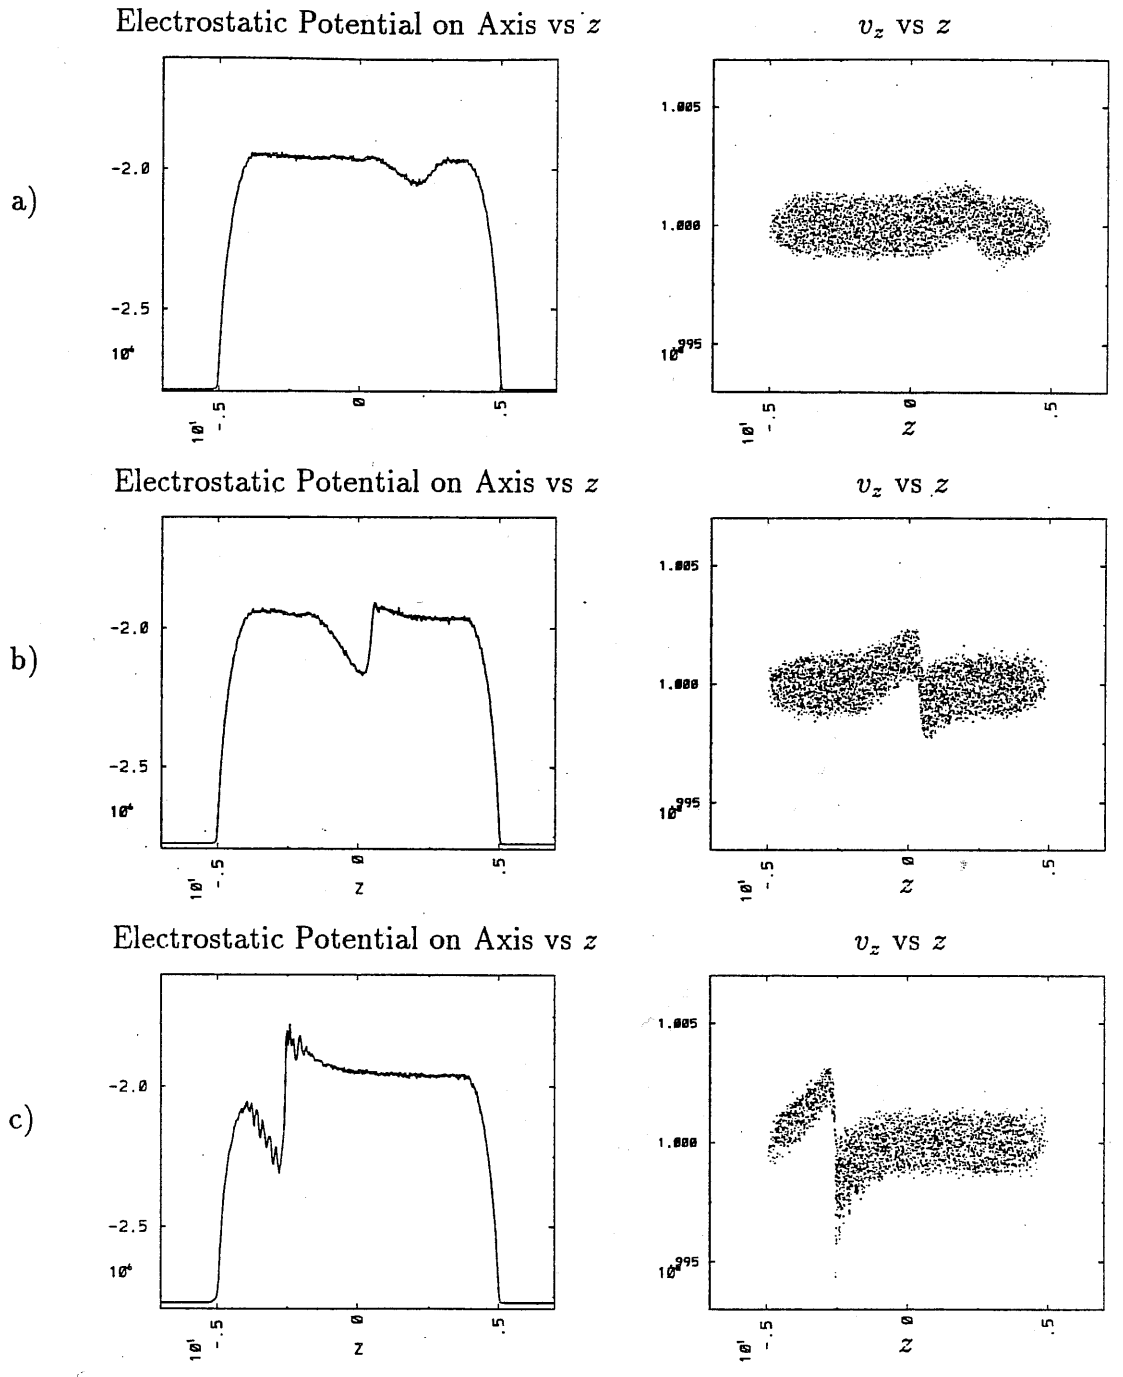

Figure 4.1: A simulation with 200 Ω/m resistance shows large amounts of growth. (a) 6.6 μs, (b) 10.9 μs, (c) 17.5 μs

from D. A. Callahan Miller, Ph. D. Thesis
U. C. Davis, 1994

CASE II RESISTIVE + CAPACITIVE IMPEDANCE

$$Z^* = \frac{R^*}{1 - i\omega C^+ R^*} = \frac{R^* + i\omega C^+ R^{*2}}{1 + \omega^2 C^{+2} R^{*2}}$$

GOING BACK TO PAGE 3:

IN LAB FRAME:

$$(\omega - kv_0)^2 - c_s^2 k^2 + \frac{iq R^* \lambda_0 \omega}{m(1 + \omega^2 C^{+2} R^{*2})} - \frac{q\omega^2 C^+ R^{*2} \lambda_0}{m(1 + \omega^2 C^{+2} R^{*2})} = 0$$

$$(\omega - kv_0)^2 - c_s^2 k^2 - \frac{4\pi\epsilon_0}{g} \frac{\omega^2 C R^{*2} c_s^2}{(1 + \omega^2 C^2 R^2)} + \frac{i 4\pi\epsilon_0 c_s^2 R_x^* \omega}{g(1 + \omega^2 C^2 R^{*2})}$$

IN BEAM FRAME:

$$\omega'^2 - c_s^2 k^2 - \frac{4\pi\epsilon_0}{g} \frac{(\omega + kv_0)^2 C R^{*2} c_s^2}{(1 + (\omega + kv_0)^2 C^2 R^2)} + \frac{i 4\pi\epsilon_0 c_s^2 R_x^2 (\omega + kv_0)}{g(1 + \omega^2 C^2 R^{*2})}$$

So if one takes limit $C \to \infty$ the final two terms tend to zero. Thus Capacitance has reduced the instability

$R^*C^* = 2 \times 10^{-8}$ s
$R^* = 100\,\Omega/m$

(15)

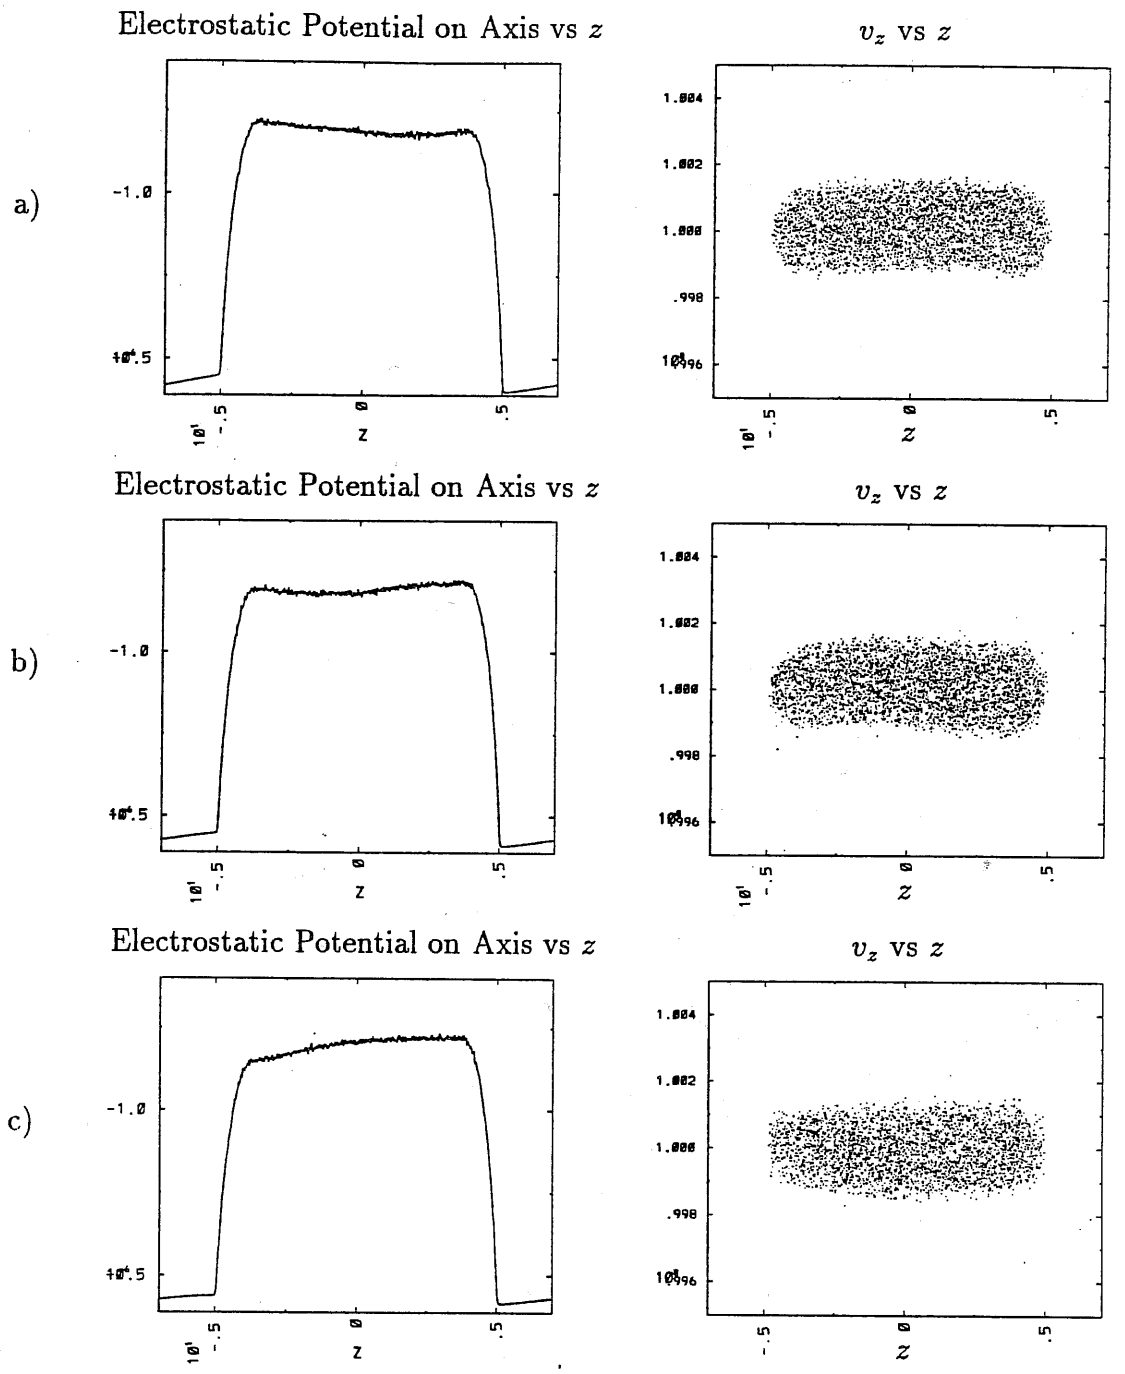

Figure 4.6: When capacitance is added to the system, a larger perturbation is launched, but little growth occurs (a) 6.6 μs, (b) 10.9 μs, (c) 17.5 μs

from D.A. Callahan Miller, Ph.D. Thesis, U.C. Davis, 1994

Summary of Longitudinal Instability

"Resistive Wall" or "Longitudinal" Instability has potential to degrade longitudinal emittance in high current accelerators.

However, capacitance (e.g. from accelerating gaps) decreases growth can mitigate the instability.

Not Discussed:

1. Longitudinal temperature damps instability (c.f. Reiser 6.3.3)

2. Feedback has been proposed to control instability if needed

National® Brand 42-182 100 SHEETS Made in U.S.A.

DRIFT COMPRESSION

OBJECTS:

APPLY A HEAD-TO-TAIL VELOCITY TILT TO INCREASE CURRENT BY DECREASING PULSE DURATION

DURING COMPRESSION "EARS" ARE NOT REQUIRED

AT END OF DRIFT COMPRESSION, VELOCITY "TILT" SHOULD BE MINIMIZED, SO THAT CHROMATIC ABERRATIONS IN FINAL FOCUS ARE MINIMIZED.

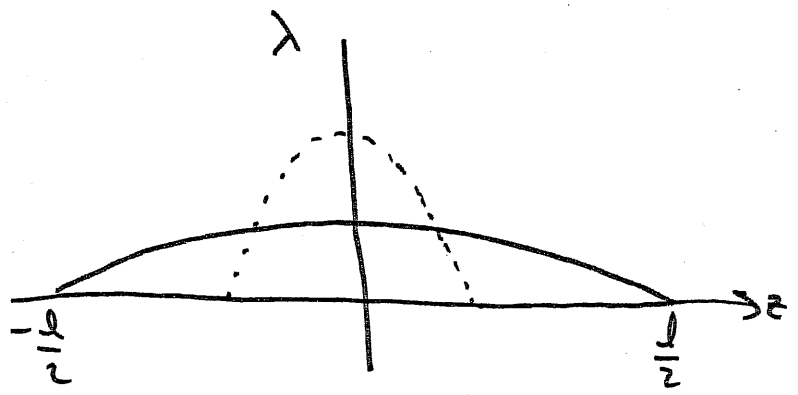

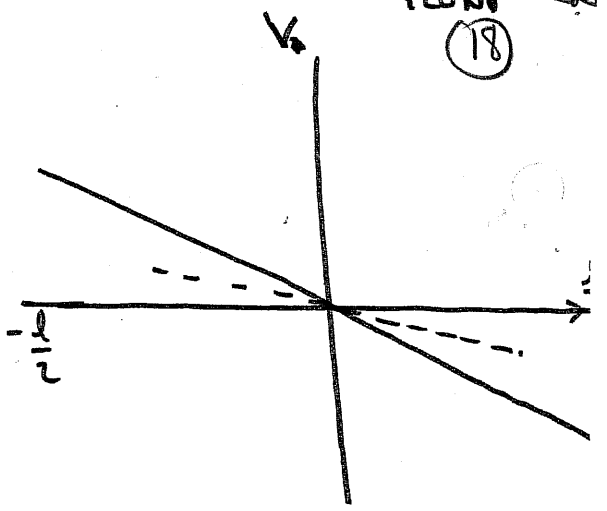

$$\frac{\partial \lambda}{\partial t} + \frac{\partial}{\partial z}\lambda v = 0$$

$$\frac{\partial v}{\partial t} + v\frac{\partial v}{\partial z} = \frac{-qg}{m\,4\pi\epsilon_0}\frac{\partial \lambda}{\partial z}$$

LET $\lambda = \lambda_0(t)\left(1 - \frac{4z^2}{l^2(t)}\right)$

$$V = -\Delta V(t)\,\frac{z}{l}$$

① MASS conservation:

$$Q_c = \int_{-l/2}^{l/2} \lambda\, dz = \lambda_0 \int_{-\frac{l}{2}}^{l/2}\left(1 - \frac{4z^2}{l^2}\right) dz = \frac{2}{3}\lambda_0 l = \text{constant}$$

$$\frac{\partial \lambda}{\partial t} = \dot{\lambda}_0\left(1-\frac{4z^2}{l^2}\right) + 2\lambda_0\left(\frac{4z^2}{l^3}\right)\dot{l}$$

$$\frac{\partial \lambda}{\partial z} = \frac{-8z}{l^2}\lambda_0$$

$$\frac{\partial V}{\partial t} = -\Delta\dot{V}\left(\frac{z}{l}\right) + \frac{\Delta V\, z}{l^2}\dot{l} \qquad \Delta V = -\dot{l}$$

$$\frac{\partial V}{\partial z} = -\frac{\Delta V}{l}$$

2) CONTINUITY EQUATION $\Rightarrow \left(1-\frac{4z^2}{l^2}\right)\left(\dot{\lambda}_0 - \frac{\Delta V \lambda_0}{l}\right) = 0$

3) MOMENTUM EQUATION $\Rightarrow \left(\frac{z}{l}\right)\left[-\Delta\dot{V} + \frac{\dot{l}\Delta V}{l} + \frac{\Delta V^2}{l} + \frac{8qg}{m4\pi\epsilon_0}\frac{\lambda_0}{l}\right] = 0$

① & ② $\Rightarrow \frac{\dot{\lambda}_0}{\lambda_0} = \frac{\Delta V}{l} = \frac{-\dot{l}}{l}$ ④

③ & ④ $\Rightarrow \boxed{\ddot{l} - \frac{12qg}{4\pi\epsilon_0 m}\frac{Q_c}{l^2} = 0}$ where $Q_c = \frac{2}{3}\lambda_0 l = \text{c}$

!!! CHARGE IN PUNCH (NOT PERVEANCE)

LONGITUDINAL "ENVELOPE" EQUATION (WITHOUT EMITTANCE)

MULTIPLY BY $\dot{l}$ & INTEGRATE:

$$\frac{\dot{l}^2}{2} + \frac{12qg}{4\pi\epsilon_0 m}\frac{Q_c}{l} = \cancel{\frac{\dot{l}_f^2}{2}} + \frac{12qg}{4\pi\epsilon_0 m}\frac{Q_c}{l_f}$$

$\dot{l}_f^2 \to 0$

$$\Rightarrow \quad \dot{l} = \sqrt{\frac{16qg}{4\pi\epsilon_0 m}\lambda_f\left[1 - \frac{l_f}{l_0}\right]}$$

NOW $Q_f = \dfrac{\lambda_f}{4\pi\epsilon_0 V_f}$ = FINAL PERVEANCE AT CENTER OF PARABOLIC PULSE

C = COMPRESSION RATIO $= \dfrac{l_0}{l_f}$

$\dfrac{\Delta V}{V_0}$ = velocity tilt $= \dfrac{|\dot{l}|}{V_0}$

$$\rightarrow \quad \boxed{\frac{\Delta V}{V} = \sqrt{8gQ_f\left[1 - \frac{1}{C}\right]}}$$

for $Q_f = 10^{-4}$
$g = 1.1$
$C = 20$

$$\Rightarrow \quad \frac{\Delta V}{V} = 0.029$$

$$\boxed{\text{DRIFT LENGTH} \cong \frac{l}{\Delta V}V_0 = \frac{l}{\Delta V/V} = 345 \text{ m} \quad \text{for } l = 10 \text{ m}}$$

Vlasov-equation for a drifting beam:

$$\frac{\partial f}{\partial s} + x'\frac{\partial f}{\partial x} + x''\frac{\partial f}{\partial x'} + y'\frac{\partial f}{\partial y} + y''\frac{\partial f}{\partial y'} + z'\frac{\partial f}{\partial z} + z''\frac{\partial f}{\partial z'} = 0$$

let $\tilde{f}(z,z',s) \equiv \iiiint f \, dx \, dx' \, dy \, dy'$

INTEGRATING VLASOV EQUATION: If $z'' \neq f(x,x',y,y')$:

$$\Rightarrow \frac{\partial \tilde{f}}{\partial s} + \iiint x \underbrace{\int \frac{\partial f}{\partial x} dx}_{= \cancel{f}\Big|_{-\infty}^{\infty} \to 0} dx' dy dy' + \cdots \quad z'\frac{\partial \tilde{f}}{\partial z} + z''\frac{\partial \tilde{f}}{\partial z'} = 0$$

$$\Rightarrow \boxed{\frac{\partial \tilde{f}}{\partial s} + z'\frac{\partial \tilde{f}}{\partial z} + z''\frac{\partial \tilde{f}}{\partial z'} = 0}$$ 1 D Vlasov

Now let $\lambda \equiv q\int \tilde{f}\, dz'$; $\lambda \overline{z'} = \int \tilde{f} z' dz'$; $\lambda \overline{z'^2} \equiv \int \tilde{f} z'^2 dz'$

Also, let $\Delta z'^2 \equiv \overline{z'^2} - (\overline{z'})^2$

FLUID EQUATIONS

INTEGRATING 1D VLASOV OVER z':

$$\boxed{\frac{\partial \lambda}{\partial s} + \frac{\partial}{\partial z}(\lambda \overline{z'}) = 0}$$ (CONTINUITY EQUATION)

MULTIPLYING BY z' & INTEGRATING VLASOV OR z':

$$\frac{\partial}{\partial s}\lambda \overline{z'} + \frac{\partial}{\partial z}\lambda \overline{z'^2} - \lambda z'' = 0$$

DIVIDING BY λ, USING CONTINUITY EQUATION & DEFINITION OF $\Delta z'^2$:

$$\boxed{\underbrace{\frac{\partial \overline{z'}}{\partial s} + \overline{z'}\frac{\partial}{\partial z}\overline{z'}}_{\text{INERTIAL}} + \underbrace{\frac{1}{\lambda}\frac{\partial}{\partial z}(\lambda \Delta z'^2)}_{\text{PRESSURE TERM}} = \underbrace{\overline{z''}}_{\text{FORCE}}}$$ (MOMENTUM EQUATION)

LONGITUDINAL ENVELOPE EQUATION

$$\frac{\partial \tilde{f}}{\partial s} + z' \frac{\partial \tilde{f}}{\partial z} + z'' \frac{\partial \tilde{f}}{\partial z'} = 0$$

Q_c = total charge in bunch

If $z'' = -K(s) z + \frac{qq}{4\pi\varepsilon_0 m v^2}\left(\frac{12 Q_c}{L^3}\right) z$

$$\Rightarrow \frac{\partial}{\partial s}\langle z^2 \rangle = 2\langle z z' \rangle$$

$$\frac{\partial}{\partial s}\langle z z' \rangle = \langle z'^2 \rangle + \frac{qq}{4\pi\varepsilon_0 m v^2}\left(\frac{12 Q_c}{L^3}\right)\langle z^2 \rangle - K(s)\langle z^2 \rangle$$

$$\frac{\partial}{\partial s}\langle z'^2 \rangle = 2\left(\frac{qq}{4\pi\varepsilon_0 m v^2}\right)\left(\frac{12 Q_c}{L^3}\right)\langle z z' \rangle - 2K(s)\langle z z' \rangle$$

NOTE $\langle z^2 \rangle = \frac{1}{Q_c}\int_{-\infty}^{\infty}\int_{-L/2}^{L/2} z^2 f(z, z')\, dz\, dz' = \frac{1}{20} L^2$

$$\varepsilon_z^2 = 25\left[\langle z^2 \rangle \langle z'^2 \rangle - \langle z z' \rangle^2\right]$$

$$\Rightarrow \frac{d^2 L}{ds^2} = \frac{16\,\varepsilon_z^2}{L^3} + \frac{12\, q q Q_c}{4\pi\varepsilon_0 m v^2 L^2} - K(s) L$$

Let $r_z = L/2$

$$\Rightarrow \boxed{\frac{d^2 r_z}{ds^2} = \frac{\varepsilon_z^2}{r_z^3} + \frac{3}{2}\frac{q q Q_c}{4\pi\varepsilon_0 m v^2}\frac{1}{r_z^2} - K(s) r_z}$$

National® Brand 42-182 100 SHEETS Made in U.S.A.

SELF-CONSISTENT LONGITUDINAL DISTRIBUTION:

NEUFFER DISTRIBUTION

D. NEUFFER, PARTICLE ACCELERATORS, Vol 11, p 23 (1980)

RETURNING TO THE 1D VLASOV EQUATION:

$$\frac{\partial f}{\partial s} + z' \frac{\partial f}{\partial z} + z'' \frac{\partial f}{\partial z'} = 0$$

If $z = -A \frac{\partial \lambda}{\partial z} - K(s) z$

THEN,

$$f(z, z', s) = \frac{3N}{2\pi \varepsilon_z} \sqrt{1 - \frac{z^2}{r_z^2} - \frac{r_z^2 (z' - r_z' z / r_z)^2}{\varepsilon_z^2}}$$

for $-r_z < z < r_z$

& $\frac{r_z' z}{r_z} - \frac{\varepsilon_z}{r_z}\sqrt{1 - \frac{z^2}{r_z^2}} \leq z' \leq \frac{r_z' z}{r_z} + \frac{\varepsilon_z}{r_z}\sqrt{1 - \frac{z^2}{r_z^2}}$

is a solution to the 1D Vlasov equation.

HERE $\varepsilon_z^2 = 25\left(\langle z^2 \rangle \langle z'^2 \rangle - \langle z z' \rangle^2\right] =$ CONSTANT

N = total number of particles in bunch

r_z = hard edge of bunch

NOTE THAT $\lambda(z) = \frac{3}{4} \frac{N}{r_z}\left(1 - \frac{z^2}{r_z^2}\right) = \int_{-r_z}^{r_z} f(z, z', s)\, dz'$

$\Rightarrow \frac{\partial \lambda}{\partial z} \propto z \Rightarrow$ LINEAR SPACE CHARGE FIELD

Neuffer Distribution Function

$$f[z,z'] = \frac{3N}{2\pi\varepsilon_z}\sqrt{1-\frac{z^2}{r_z^2}-\frac{r_z^2(z'-r_z'z/r_z)^2}{\varepsilon_z^2}}$$

for:

$$-r_z \le z \le r_z$$

$$\frac{r_z'z}{r_z}-\frac{\varepsilon_z}{r_z}\sqrt{1-\frac{z^2}{r_z^2}} \le z' \le \frac{r_z'z}{r_z}+\frac{\varepsilon_z}{r_z}\sqrt{1-\frac{z^2}{r_z^2}}$$

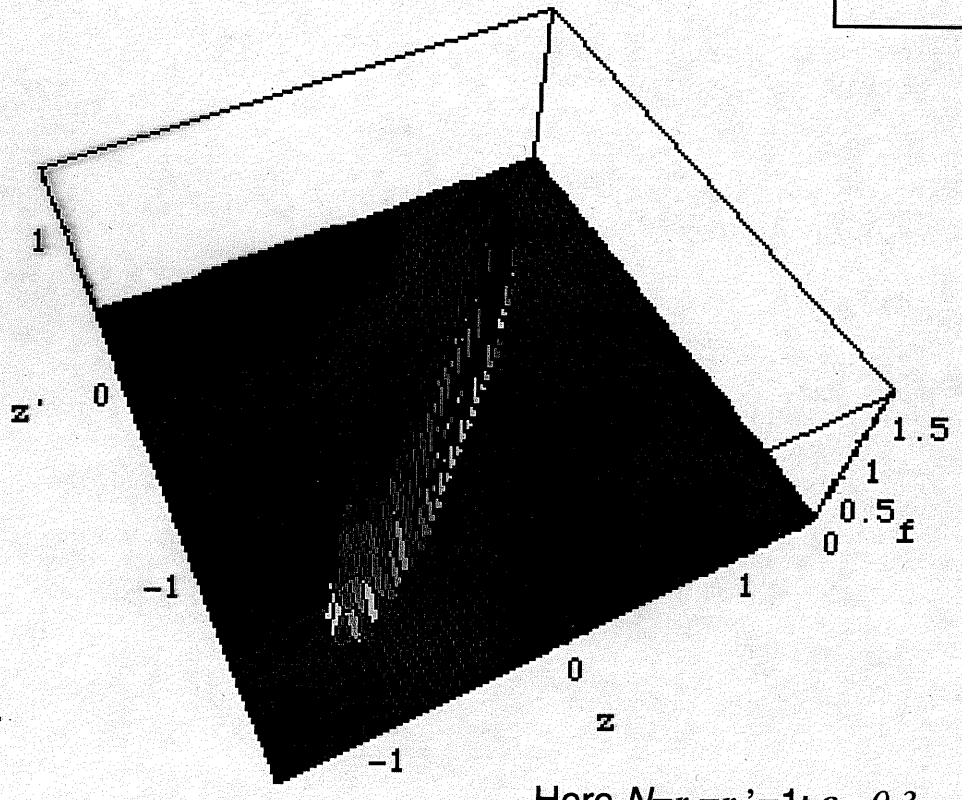

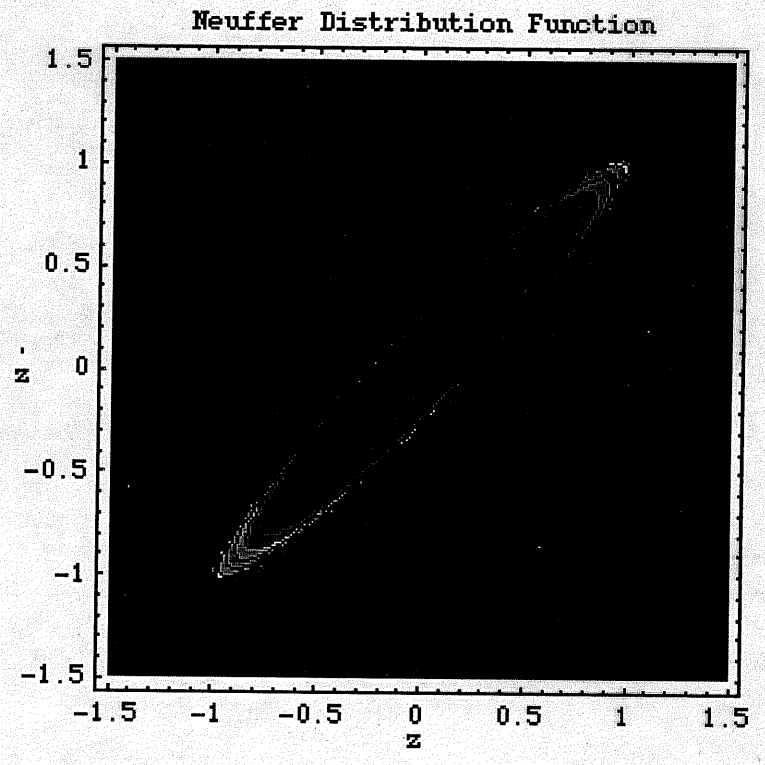

Here $N=r_z=r_z'=1$; $\varepsilon_z=0.3$

NOTE:

- DISTRIBUTION FUNCTION HAS ELLIPTICAL BOUNDARY IN z-z' PHASE SPACE
- $\pi \varepsilon_z$ IS AREA OF ELLIPSE AND IS CONSTANT
- ANALOGOUS TO K-V DISTRIBUTION WITH LINEAR SPACE CHARGE FORCE AND SECOND ORDER ENVELOPE EQUATION TO DESCRIBE THE MOTION OF THE DISTRIBUTION:

$$\frac{d^2 r_z}{ds^2} = \frac{\varepsilon_z^2}{r_z^3} + \frac{3}{2}\frac{AN}{r_z^2} - K(s)\, r_z$$

NOTE ALSO THAT NEUFFER FUNCTION CAN BE USED FOR BUNCHED BEAMS IN WHICH $E_z \propto z$, AS IN A UNIFORM DENSITY ELLIPSOID.

Summary

1D VLASOV EQUATION

& g-factor model

$$\frac{\partial \tilde{f}}{\partial s} + z' \frac{\partial \tilde{f}}{\partial z} + z'' \frac{\partial \tilde{f}}{\partial z'} = 0 \qquad z'' = \frac{-g}{4\pi\epsilon_0 m V_0^2} \frac{\partial \lambda}{\partial z}$$

Leads to fluid equations:

$$\frac{\partial \lambda}{\partial s} + \frac{\partial}{\partial z}(\lambda \bar{z}') = 0$$

$$\frac{\partial \bar{z}'}{\partial s} + \bar{z}' \frac{\partial \bar{z}'}{\partial z} + \frac{1}{\lambda}\frac{\partial}{\partial z}(\lambda \Delta z'^2) + \frac{c_s^2}{\lambda V_0^2}\frac{\partial \lambda}{\partial z} = 0$$

$\Rightarrow$ SPACE CHARGE WAVES

↳ LONGITUDINAL OR RESISTIVE WALL INSTABILITY

$\Rightarrow$ SPACE CHARGE RAREFACTION WAVES

$\Rightarrow$ PARABOLIC BUNCH COMPRESSION

VLASOV EQUATION ALSO $\Rightarrow$ ENVELOPE EQUATION

$$\frac{d^2 r_z}{ds^2} = \frac{\varepsilon_z^2}{r_z^3} + \frac{3}{2}\frac{g\, q\, Q_c}{4\pi\epsilon_0 m V^2}\frac{1}{r_z^2} - K(s)\, r_z$$

KINETIC SOLUTION TO VLASOV EQUATION SATISFYING RMS ENVELOPE EQUATION IS "NEUFFER DISTRIBUTION" (ANALOGOUS TO KV).

$$f(z, z') = \frac{3N}{2\pi\varepsilon_z}\sqrt{1 - \frac{z^2}{r_z^2} - \frac{r_z^2 (z' - r_z' z / r_z)^2}{\varepsilon_z^2}}$$